



## **SPIDER LIFT**

## 2 Palazzani














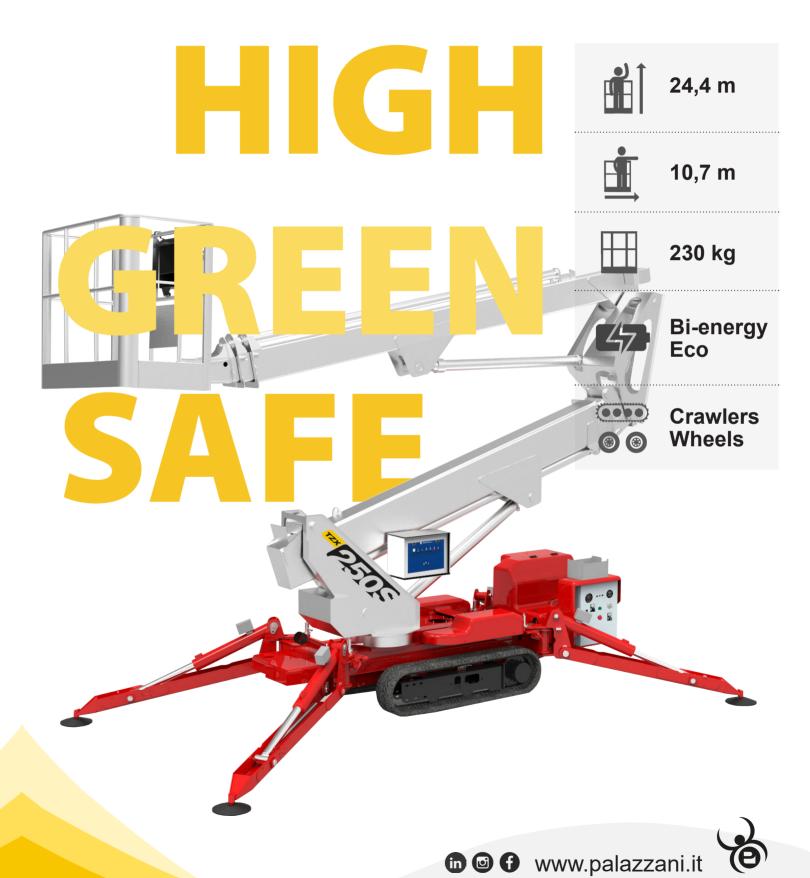





## **AVAILABLE OPTIONS**

## **STANDARD EQUIPMENT**

- **CANBUS** electronics
- Hydraulic transmission on non-marking rubber tracks with 2 speeds
- Hydraulic set-up with 4 independent outriggers, of the rotating type
- 2 aluminium made articulated double telescopic booms
- Safe working load 120/250 kg
- Aluminium cage 140x70x110cm
- Cage with automatic self-levelling
- Cage with hydraulic rotation 90° + 90°
- Cage equipped with support of fast disassembling for narrow passages
- Boom slewing under any condition of load and set-up at 360°
- Area limiting system according to load and set-up (supplementary moment sensing system)
- Electric and proportional controls and dual panel: cage panel and ground panel
- 230VAC electric plug on the cage
- CE Mark homologation certificates, manuals, stickers and spares book in English language









AIR/WATER SUPPLEMENTARY LINE ALONG THE BOOM WITH **INTERNAL HOSE** 



**CUSTOMIZED COLOURS** 



PROTECTION OF OUTRIGGERS' **CYLINDERS** 



**LED LIGHT** 



**BASKET ANTI-COLLISION KIT** WITH ULTRASONIC SENSORS AND LASERS



**RADIO CONTROL** 



CONTROL FOOT PEDAL ON THE CAGE



**INTER-PHONIC COMMUNICATION SYSTEM** 



PADS FOR OUTRIGGERS



**ELECTRONIC ANEMOMETER** 



"RETURN TO HOME" FUNCTION



**DRINK HOLDER IN THE BASKET** 



**DIAGNOSTIC CABLE KIT** 



HANDS HEATER IN THE BASKET



**EMERGENCY ELECTROPUMP KIT** 



24+6 MONTHS OF WARRANTY ON THE BATTERY

